



KAINDL

COUNTRY
STYLE
FLOORS



KAINDL

**COUNTRY
STYLE**
AMELIA



KAINDL

COUNTRY STYLE

Antique Classic



KAINDL

COUNTRY STYLE


Rosarno









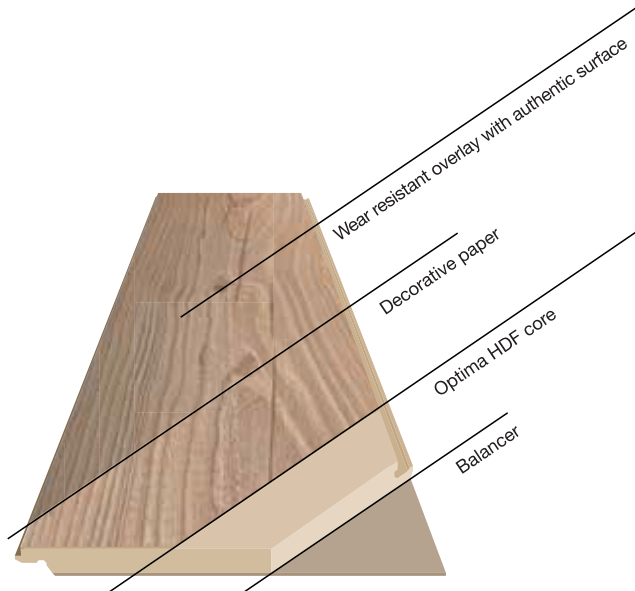



KAINDL

COUNTRY STYLE

Stone Grey



Test		Flooring ¹ Symbols	Results
Panel dimension and packaging			Pack: 9pcs. / 2.40 m ² / 17,0 kg 1383x193x8mm
Service category per Standard per	EN 685 EN 13329		32
Abrasion resistance	N 13329		AC4
Impact resistance	EN 13329		≤ 12N ≤ 750mm
Formaldehyde emission of the substrate before coating	EN 120 DIBT-Richtlinie 100		E1
Formaldehyde emission	EN 717-1 EN 717-2		< 0,1ppm < 3,5 mg/h m ²
Floorconstruction			GREENGUARD GOLD
Formaldehyde emission	CARB		CARB Phase 2
Thickness swelling / edge swelling	EN 13329		< 18 %
Thermal conductivity	ISO 8302		0,0780 m ² .K/W
Moisture residue HDF	EN 322		4-7%
Resistance to cigarette burns	EN 438-2.18		grade 4
Light fastness	EN ISO 105-B02 EN 20105-A02		not worse than 6 Blue wool scale not worse than 4 Grey
Lifting resistance	EN 13329		≥ 1 N/mm ²
Cross tensile strength	EN 319		> 1 N/mm ²
Resistance to stains	EN 438-2.15		Group 1-2 Grade 5 Group 3 Grade 4
Combustibility	EN13501-1		Cfl , s1

All values are approximate values - fluctuations cannot be absolutely ruled out.

